
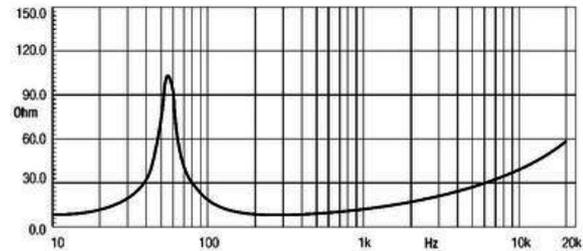


- 99 dB SPL 1W/ 1m average sensitivity
- 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
- 450 WAES power handling
- Neodymium magnet assembly
- Ideal for compact reflex enclosures and two-way systems

The 12ND830 is a 300mm (12 in) neodymium Mid-bass transducer, and differs from the 12ND930 in the wire conception, offering a lighter speaker with a lower force factor. The 12ND830 finds its ideal application in compact reflex enclosures where a considerable amount of low frequencies and low distortion are required. Its optimum low weight makes it suitable for fixed installations or portable professional loudspeaker systems. The neodymium magnet assembly developed by Eighteen Sound engineers assures a high flux concentration, low power compression and excellent heat exchange since the external magnet configuration is considerably more efficient than traditional under-pole magnet topology. The direct contact between the large heat sink and the specially designed basket, together with the magnetic structure, represents a fundamental improvement in thermal connection and heat dissipation. The result is increased power handling capabilities and lower power compression. The deep profile curvilinear cone, made from a special high strength wood pulp, has been designed to achieve the best possible linearity within its frequency range. The cone surround, made from linen material is highly resistant to aging and fatigue. The in-house developed cone treatment is fully water repellent and also gives a significant degree of rigidity to the cone. The 75 mm Interleaved Sandwich Voice coil (ISV) assembly is wound on a strong fiberglass former which improves force transmission and thermal power handling. A special coating applied to both the top and back plates makes the 12ND830 far more resistant to the corrosive effects of salts and oxidization.

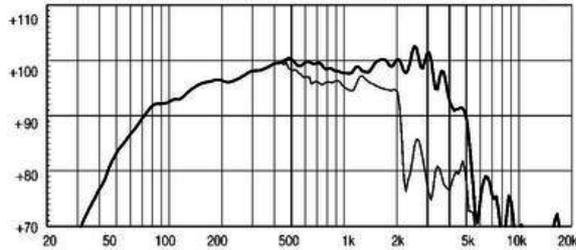

### SPECIFICATIONS

|  |                |
|--|----------------|
| Nominal Diameter                       | 300 mm ( in)   |
| Nominal Impedance                      | 8 Ω            |
| Minimum Impedance                      | 7.0 Ω          |
| Nominal Power Handling <sup>1</sup>    | 450 W          |
| Continuous Power Handling <sup>2</sup> | 700 W          |
| Sensitivity <sup>3</sup>               | 99.0 dB        |
| Frequency Range                        | 53 - 5000 Hz   |
| Voice Coil Diameter                    | 75 mm (3.0 in) |
| Winding Material                       | aluminum       |

### DESIGN

|                        |  |
|------------------------|--|
| Surround Shape         | M-roll                                       |
| Cone Shape             | Curvilinear                                  |
| Magnet Material        | Neo  |
| Woofers Cone Treatment | Weather protected                            |
| Recommended Enclosure  | 75.0 dm <sup>3</sup> (2.65 ft <sup>3</sup> ) |
| Recommended Tuning     | 55 Hz  |

### PARAMETERS<sup>4</sup>

|                     |  |
|---------------------|--|
| Resonance Frequency | 55 Hz  |
| Re                  | 5.7 Ω  |
| Qes                 | 0.3  |
| Qms                 | 5.15   |
| Qts                 | 0.28   |
| Vas                 | 72.0 dm <sup>3</sup> (2.54 ft <sup>3</sup> )   |
| Sd                  | 531.0 cm <sup>2</sup> (82.31 in <sup>2</sup> ) |
| Xmax                | 6.5 mm   |
| Mms                 | 46.0 g   |
| Bl                  | 17.6 Txm                                       |
| Le                  | 1.5 mH   |
| EBP                 | 183 Hz   |

### MOUNTING AND SHIPPING INFO

|                             |  |
|-----------------------------|--|
| Overall Diameter            | 315 mm (12.4 in)                         |
| Bolt Circle Diameter        | 296 mm (11.65 in)                        |
| Baffle Cutout Diameter      | 282.0 mm (11.1 in)                       |
| Depth                       | 140 mm (5.51 in)                         |
| Flange and Gasket Thickness | 9 mm (0.35 in)                           |
| Net Weight                  | 4.3 kg (9.48 lb)                         |
| Shipping Weight             | 5.0 kg ( lb)                             |
| Shipping Box                | 332 x 332 x 184 mm (13.07x13.07x7.24 in) |

1. 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.