




12NTLW3500

8Ω

LF drivers - 12.0 Inches

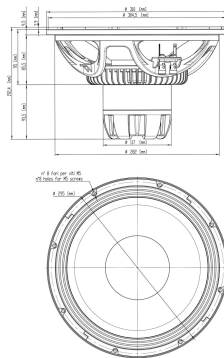

- 96 dB SPL 1W / 1m average sensitivity
- 88 mm (3.5 in) voice coil
- 900 W AES power handling
- Extremely balanced BL shape for maximum SPL
- Optimized thermal conductivity
- Maximum linearity and inductance symmetry for extended mid-band clarity
- Ideal for two-ways and line array applications



Description

The 12NTLW3500 represents the latest 18sound technology for high quality, low distortion applications. The Dual Gap technology comes directly from the Tetracoil motor structure and uses the same concept to

Eighteen Sound Srl

Via Botticelli 8 - 42124 Mancasale (RE) - ITALY - Ph. +39 0522 1861800 - Fax +39 0522 1861801 - info@eighteensound.it



maximize its benefits in terms of thermal dissipation and BI symmetry to a wider frequency band, making the 12NTLW3500 the perfect component both as a woofer and a midbass.

Dual gap motors linearize inductance and the perfect balance we reached between the motor and the ultra linear suspension allows both very high excursion and extreme precision in the mid band with the lowest intermodulation distortion in the professional market.

This features, together with its extreme low weight (only 4.8 Kg) make the 12NTLW3500 the perfect component for highest quality line arrays and two way systems, thanks also to its 1800 watts power handling capabilities.

12NTLW3500

LF drivers- 12.0 Inches

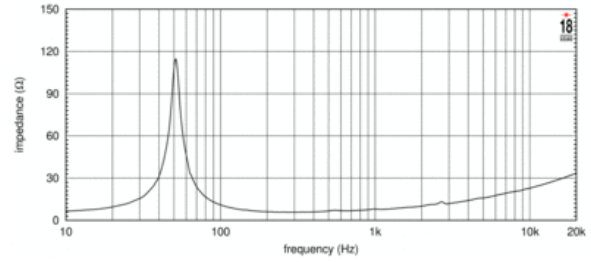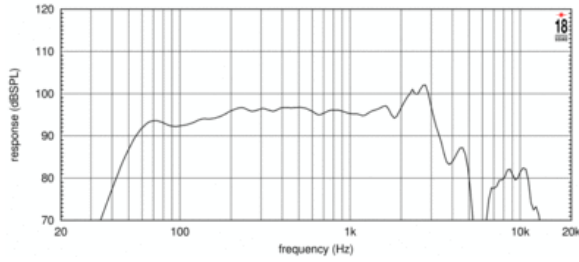

SPECIFICATIONS

Nominal Impedance	8 Ω
Minimum Impedance	5.8 Ω
Nominal Power Handling ¹	900 W
Continuous Power Handling ²	1800 W
Sensitivity ³	97.0 dB
Frequency Range	50 - 3000 Hz
Voice Coil Diameter	88 mm (3.5 in)

DESIGN

Surround Shape	M-roll
Cone Shape	Straight
Magnet Material	Neo
Woofer Cone Treatment	Water,UV repellent
Recommended Enclosure	50.0 dm ³ (1.77 ft ³)
Recommended Tuning	58 Hz

PARAMETERS⁴

Resonance Frequency	53 Hz
Re	5.1 Ω
Qes	0.35
Qms	8.0
Qts	0.33
Vas	45.0 dm ³ (1.59 ft ³)
Sd	531.0 cm ² (82.31 in ²)
η _o	1.8 %
X _{max}	9.0 mm
M _{ms}	80.0 g
Bl	19.5 Txm
Le	0.46 mH
EBP	151 Hz

MOUNTING AND SHIPPING INFO

Overall Diameter	310 mm (12.2 in)
Bolt Circle Diameter	295 mm (11.61 in)
Baffle Cutout Diameter	282.0 mm (11.1 in)
Depth	193 mm (7.6 in)
Flange and Gasket Thickness	13 mm (0.53 in)
Net Weight	4.8 kg (10.58 lb)
Shipping Weight	5.5 kg (12.13 lb)

SERVICE KIT

1. 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated nominal impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.